LFT1500



1800 Indicator

High Accuracy with Lasting Reliability

Approved Weighing to Class IIII for Waste Vehicles


Approved Chassis Weighing System for Charging and Price Management by Weight

The LFT1500 approved body weighing system is a high-accuracy, legal-for-trade system for invoicing at the point of collection. LFT1500 comprises four or six approved load cells (mounted between the chassis and body), an inclinometer, and the 1800 in-cab indicator.

- Approved for trade invoicing from the cab
- OIML R76 approved to Class IIII
- Accurate to 20 kg in 15,000 kg
- Ideal for waste and recycling vehicles
- Tilt compensation of up to 10 degrees
- Comprises 4 or 6 load cells
- 22,000 kg capacity each load cell



LFT1500 Load Cell

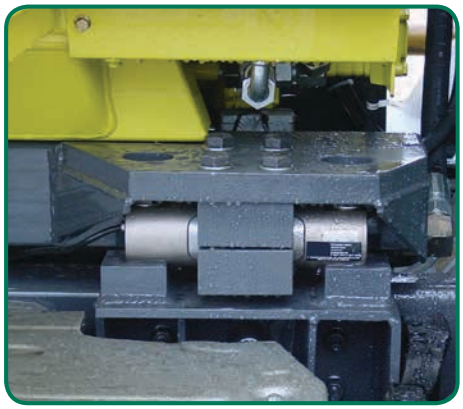

The unique 'flexible' mounting bracket allows the chassis to 'twist' enabling greater accuracies; together with the chassis inclinometer, accuracies of 20 kg are standard. The 1800 weighing instrument displays large easy-to-read characters and features options such as Bluetooth.

Airedale House | Canal Road | Bradford BD2 1AG
Ph: +44 (0)1274 771177 | Fax: +44 (0)1274 781178
E-mail: obw.eur@vpgsensors.com

vpgonboard.com

VPG ONBOARD WEIGHING

DISCLAIMER: ALL PRODUCTS, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE. Vishay Precision Group, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "VPG"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product. The product specifications do not expand or otherwise modify VPG's terms and conditions of purchase, including but not limited to, the warranty expressed therein. VPG makes no warranty, representation or guarantee other than as set forth in the terms and conditions of purchase. **To the maximum extent permitted by applicable law, VPG disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.** Information provided in datasheets and/or specifications may vary from actual results in different applications and performance may vary over time. Statements regarding the suitability of products for certain types of applications are based on VPG's knowledge of typical requirements that are often placed on VPG products. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. You should ensure you have the current version of the relevant information by contacting VPG prior to performing installation or use of the product, such as on our website at vpgsensors.com. No license, express, implied, or otherwise, to any intellectual property rights is granted by this document, or by any conduct of VPG. The products shown herein are not designed for use in life-saving or life-sustaining applications unless otherwise expressly indicated. Customers using or selling VPG products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify VPG for any damages arising or resulting from such use or sale. Please contact authorized VPG personnel to obtain written terms and conditions regarding products designed for such applications. Product names and markings noted herein may be trademarks of their respective owners.